


Remove all burs & Sharp Edges

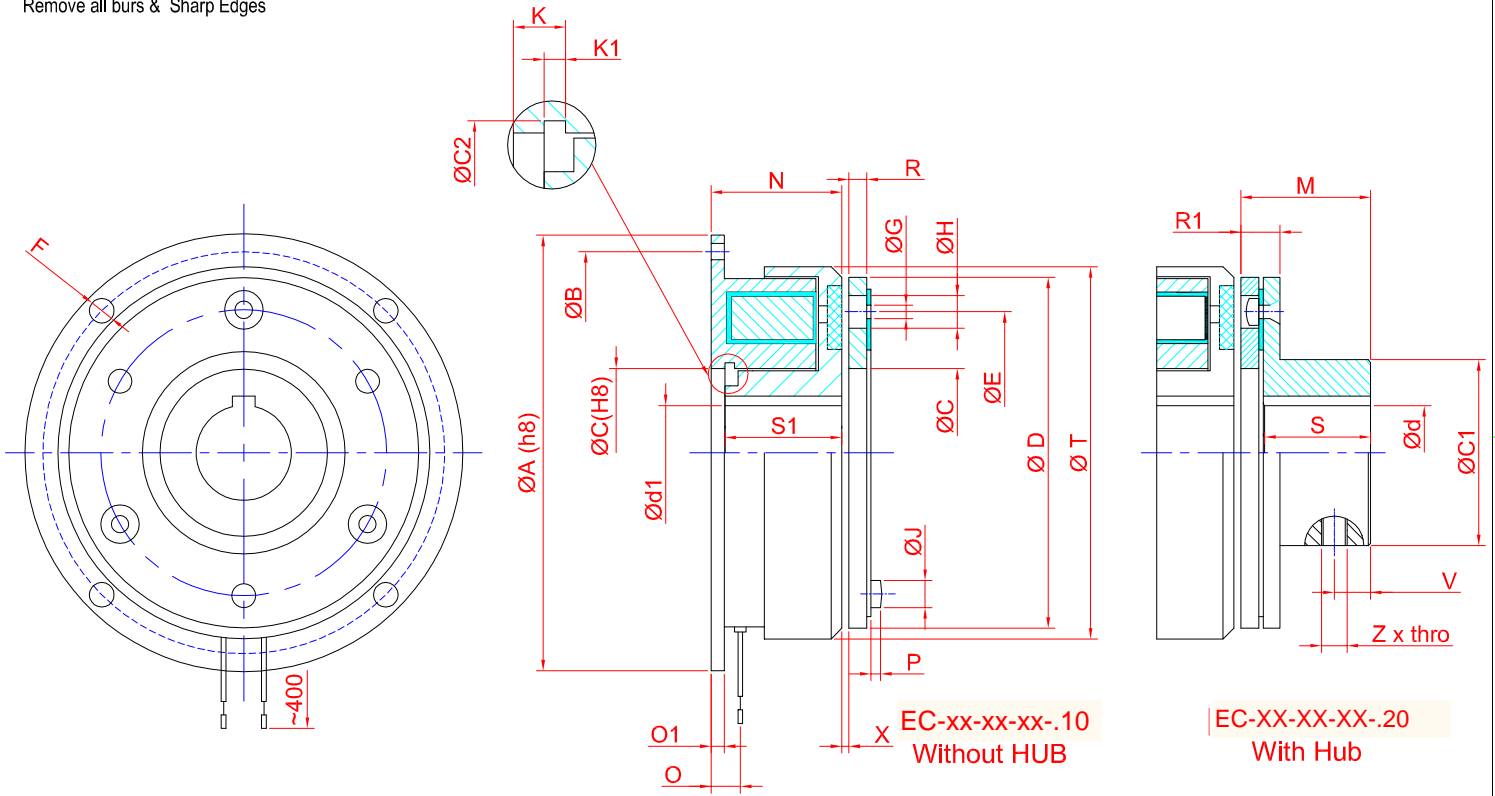

Electromagnetic single disc Clutches.

For dry Running
24 V DC.

Size	`006	`010	`020	`050	100	200
Torque	7	15	30	65	125	220
Power @ 20°C (Watt)	16	20	30	36	54	72
A	80	100	125	150	190	230
B	72	90	112	137	175	215
C	35	42	52	62	80	100
C1	32	38	48	58	73	92
C2	36	43.5	53.8	63.8	82.1	102.1
d (max)	18	22	28	32	45	60
d1 (max)	20	25	28	32	45	60
D	63	80	100	125	160	200
E	46	60	76	95	120	158
F	4*4.5	4*5.5	4*6.6	4*6.6	4*9	4*9
G	3*4.1	3*4.1	3*5.1	3*6.1	3*8.1	3*10.1
H	10	11	11.6	15	21	25
J	8	8	10	11.5	14.5	17.5
K	3.5	4.25	5	5.5	6	7
K1	1.6	1.85	2.15	2.15	2.65	3.15
M	18.8	24.8	31	36.9	46.9	59.15
N	24	26.5	30	33.5	37.5	44
O	6	7	8	9	11	12
O1	3	3	4	4	5	5
P	2	2	2.5	3	4	4.5
R	3.8	4.3	6	6.9	8.9	11.2
R1	7.5	8.3	11	12.9	16	20.2
S	15	20	25	30	38	48
S1	22	24	27	30	34	43
X	0.2	0.2	0.3	0.3	0.3	0.4
V	6	8	10	12	15	19
Z	M6	M6	M8	M10*2	M10*2	M12*2
Weight in Kgs	.10	0.55	0.9	1.6	3.2	5.8
	.20	0.6	1.1	1.9	3.4	6.2

Dimensions in mm, Tolerances unless otherwise stated-NOM

Title :-				CHKD		Prinivas		
Single Disc Clutches				DRN		chandraith		
00	Initial Drawing	31/12/2015	Vinod	DATE		01.08.2016		
REV	DETAIL	DATE	APVD	SCALE		DRG. NO.		
NARSIPUR & SONS Bangalore- 74			Location :- Electromagnetic Clutches			NS/EC-XXX.10/20		A4